

Speed

Precision


Independent Shuttle Control

SuperTrak[™]
HORIZON3

The Foundation of World
Leading Automation[™]
just got more compact!


SuperTrak[™]
CONVEYANCE

Introducing the latest addition to the SuperTrak CONVEYANCE[™] portfolio. SuperTrak HORIZON3[™] can carry up to 3kg per shuttle with 50mm shuttle-to-shuttle pitch. SuperTrak HORIZON3[™] is designed for cost-efficient automation in smaller footprints — helping you achieve more with less.

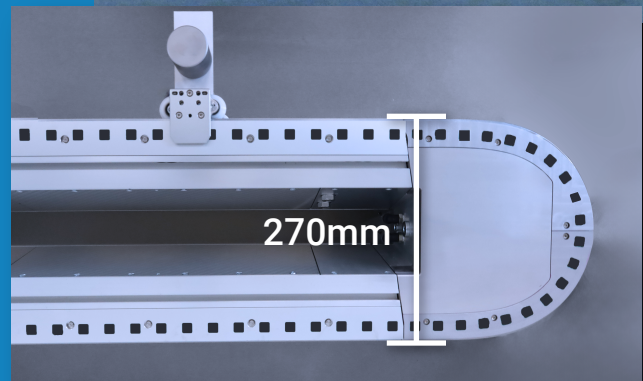

SuperTrak CONVEYANCE™

Product Specifications

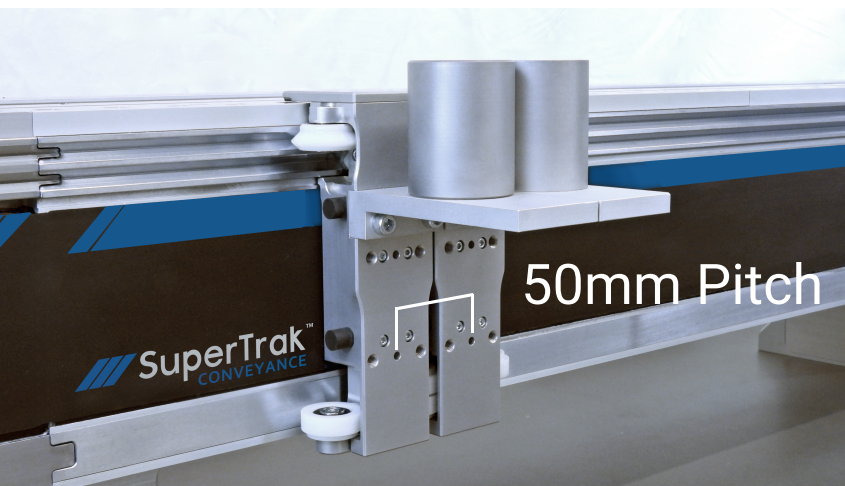

Straight Section	1000mm
180° Section	300mm Width (270mm flat rail to flat rail)
Product Fixture Width	50mm +
Maximum Speed	4 m/s
Acceleration	3G with 1 kg Payload*
Repeatability	+/- 0.01mm (straight section) +/- 0.025mm (curved section)
Payload	3 kg per shuttle
Standard Shuttle Identification	Integrated in track
Process on Curve	Full control

Communication    

*More acceleration vs payload information available
Speak to a member of the SuperTrak Team for more info.



Learn more about the
SuperTrak HORIZON3™